


BALL VALVES

SIZES: 1/4" to 12"


DESIGN DESCRIPTION

Ball valves are available in straightway design for quarter-turn on/off applications or multiport for diverter functions. Ball valves can be supplied in a wide variety of materials, style, end connections, and pressures. Standard port (bore) is reduced, though full port design is available in most styles. Fire-safe ball valves are also available. Typical ball valves are constructed with teflon seats and as such have limited temperature service range. Metal seated ball valves are available for severe or high temperature service.


Bronze ball valves are typically rated 400/600 WOG. Steel and stainless are typically 800/2000 WOG. Special high pressure ball valves can be supplied in steel or stainless rated 3000 WOG.

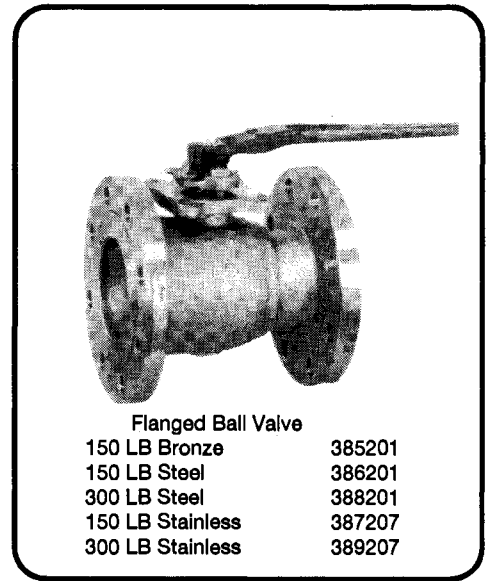


Flanged Ball Valve
 150 LB Bronze 385201
 150 LB Steel 386201
 300 LB Steel 388201
 150 LB Stainless 387207
 300 LB Stainless 389207




1-Piece or 2-Piece Economy Style
 Threaded or Solder Ends
 Not Suitable For Socket-welding or Silbraze
 Bronze Thrd 375202
 Bronze Solder 374202
 Steel Thrd 376201
 Stainless Thrd 377207



3-Piece Threaded Socketweld or Silbraze Ends
 Bronze Thrd 375302
 Bronze S/B 375332
 Steel Thrd 376301
 Steel SW 376331
 Stainless Thrd 377307
 Stainless SW 377337




Union End Threaded, Socketweld or Silbraze
 Bronze Thrd 375502
 Bronze S/B 375532
 Steel Thrd 376501
 Steel SW 376531
 Stainless Thrd 377507
 Stainless SW 377537




3-Way Multiport Diverter
 Bronze Thrd 375902
 Stainless Thrd 377907
 Bronze Flanged 385303
 Steel Flanged 386301
 Stainless Flngd 387307

Change last digit to:
 3 to order full port
 7 to order stainless ball
 9 full port SS ball



Standard Port




Full Port

Lever / Operator Options:

- Stainless Lever
- Round Handle for space limited applications
- Locking Lever
- Deadman Spring Return Lever
- Gear Operator
- Motor Operator - Electric, Pneumatic, or Hydraulic


OTHER BALL VALVES



Tank Mount




Ball-o-fix
 Compression, FPT, MPT



High Pressure
 3-10,000 PSI



Butterball
 Thread end



PVC
 True Union