



TECHNICAL DATA

GLOBE SCREW-DOWN CHECK VALVES BRONZE - 16K

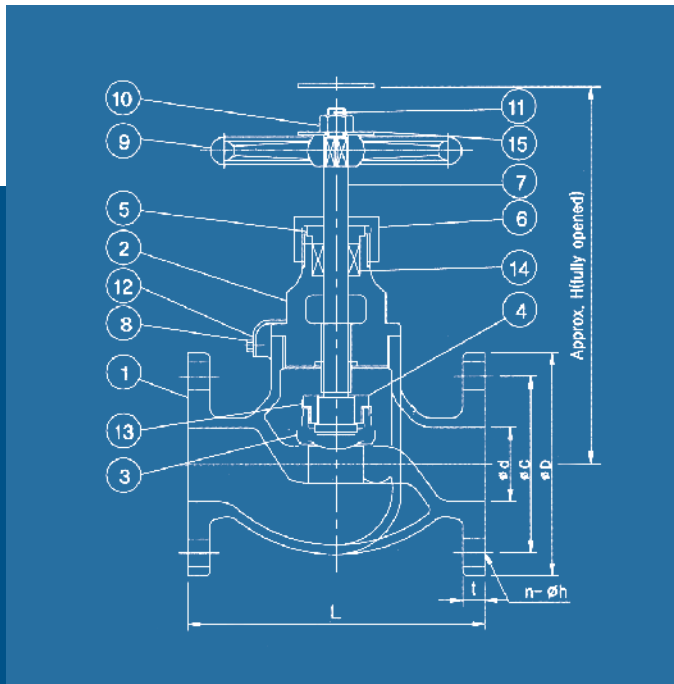

Screw Down Non Return (SDNR)

TECHNICAL FEATURES

- | | | |
|-----------|------------------|----------------|
| 1 | body | bronze |
| 2 | bonnet | bronze / brass |
| 3 | disc | bronze / brass |
| 4 | valve disc nut | brass |
| 5 | packing gland | brass |
| 6 | gland nut | brass |
| 7 | stem | brass |
| 8 | set screw | brass |
| 9 | handwheel | cast iron |
| 10 | hexagon nut | brass |
| 11 | split pin | brass |
| 12 | lock plate | brass |
| 13 | disc lock washer | brass |
| 14 | packing | non asbestos |
| 15 | washer | steel |
| 16 | indicator plate | brass |
| 17 | indicator piece | brass |

FLUID CONDITION & MAX. WORKING PRESSURE

Rating	Fluid Condition	JIS 16K
	Steam up to 205°C	1.57(16)
	Air, Gas, Oil and Pulsation Water	1.57(16)
	Non-shock water up to 120 °C	2.16(22)

DIMENSIONS

Rating	size (mm)	Ød (mm)	ØD (mm)	ØC (mm)	N-Øh (mm)	t (mm)	L (mm)	H (mm)	Weight (kg)
JIS 16K	15A	15	95	70	4-15	12	110	130	2.76
(JIS F7409)	20A	20	100	75	4-15	14	120	140	3.72
	25A	25	125	90	4-19	14	130	160	5.20
	32A	32	135	100	4-19	16	160	170	6.91
	40A	40	140	105	4-19	16	180	190	8.43



www.wosupply.com