
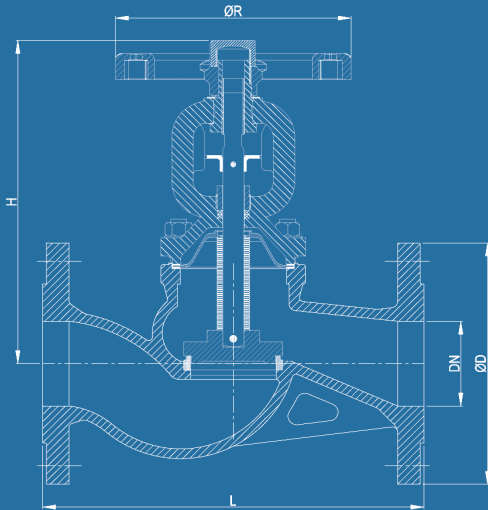


TECHNICAL DATA

GLOBE VALVE - STRAIGHT - BELLOW SEALED

STOP TYPE

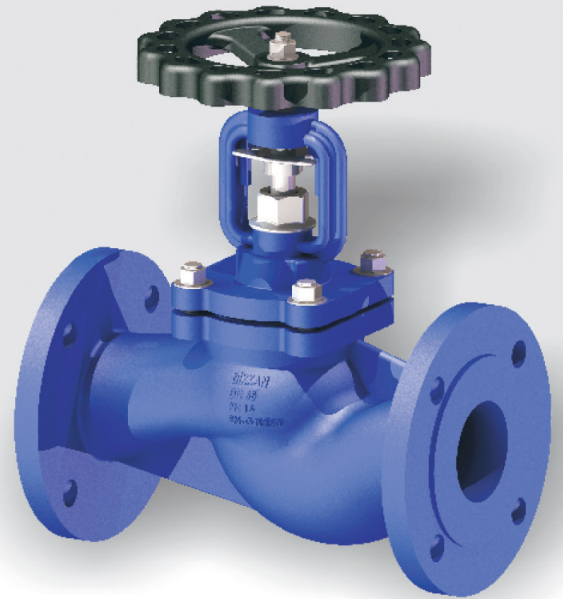

DIMENSIONS

DN (mm)	ØD PN10/16	ØD PN25/40	L (mm)	H (mm)	ØR (mm)	Weight (kg)
15	95	95	130	190	120	4.0
20	105	105	150	190	120	4.5
25	115	115	160	190	140	6.0
32	140	140	180	195	140	8.0
40	150	150	200	220	160	11
50	165	165	230	210	160	13
65	185	185	290	230	180	19
80	200	200	310	260	200	25
100	220	235	350	345	225	35
125	250	270	400	340	250	55
150	285	300	480	435	300	80
200	340	360/375	600	550	400	135

TECHNICAL FEATURES

Body	Cast steel / Stainless steel
Stem/seat	Stainless steel
Design	Body: DIN 86251 STOP Type
Face to Face	EN 558 Series 1 (DIN 3202 F1)
Flange Dimension	DIN Flanges acc. to EN 1092/B (DIN 2501)
Pressure Rating	PN 16 - PN 40
Temperature Range	-10 °C...+300 °C
Options	Regulating disc, balance disc
Flange Options	Special flange drilling acc. to ANSI or JIS

- Double skinned bellow sealed globe valves with safety packing as secondary seal, straight pattern, raised face flanges acc. to DIN standards. TYPE APPROVED. With standard position indicator, grease nipple, outside screwed stem and non rising handwheel.
- Application: Industry, power stations, steam installations, heating systems.



www.wosupply.com