


TECHNICAL DATA

GLOBE VALVE - ANGLE - BELLOW SEALED

STOP TYPE

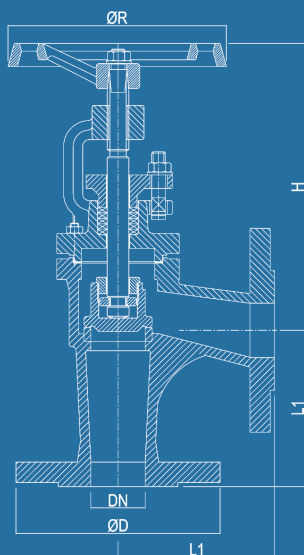

DIMENSIONS

DN (mm)	ØD PN10/16	ØD PN25/40	L1 (mm)	H1 (mm)	ØR (mm)	Weight (kg)
15	95	95	90	180	120	4.0
20	105	105	95	180	120	4.5
25	115	115	100	180	140	5.0
32	140	140	105	185	140	7.0
40	150	150	115	200	160	8.5
50	165	165	125	210	160	11
65	185	185	145	220	180	15
80	200	200	155	250	200	20
100	220	220	175	320	225	31
125	250	270	200	350	250	49
150	285	300	225	375	300	63
200	340	360/375	275	500	400	105

TECHNICAL FEATURES

Body	Cast steel / Stainless steel
Stem/seat	Stainless steel
Design	DIN 86251 Stop Type
Face to Face	EN 558 Series 8 (DIN 3202 F32)
Flange Dimension	DIN Flanges acc. to EN 1092/B (DIN 2501)
Pressure Rating	PN 16 - PN 40
Temperature Range	-10 °C...+300 °C
Options	Regulating disc
Flange Options	Special flange drilling acc. to ANSI or JIS

- Double skinned bellow sealed globe valves with safety packing as secondary seal aple pattern, raised face flanges acc. to DIN standards. With standard position indicator, grease nipple, outside screwed stem and non rising handwheel.
- Application: Industry, power stations, steam installations, heating systems.



www.wosupply.com