


TECHNICAL DATA

CHECK VALVE - STRAIGHT

LIFT TYPE - DIN LENGTH

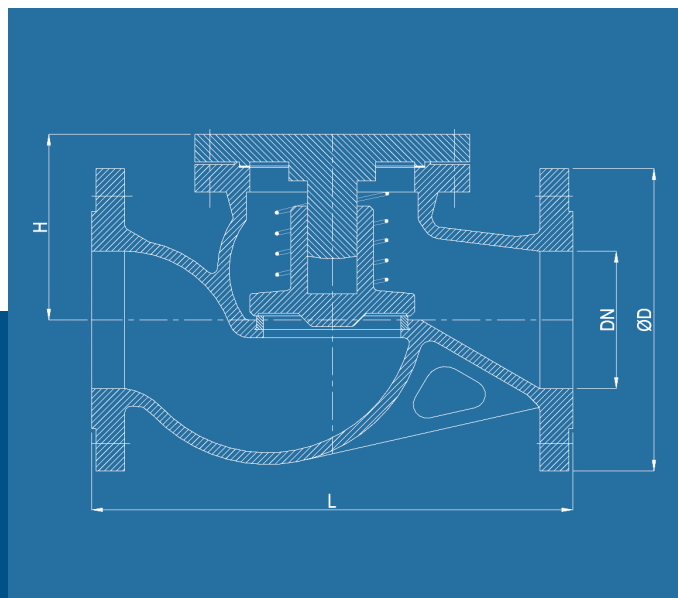

DIMENSIONS

DN (mm)	ØD PN10	ØD PN16	L (mm)	H (mm)	Weight (kg)
15	95	95	130	55	3.0
20	105	105	150	55	3.5
25	115	115	160	65	4.0
32	140	140	180	75	5.0
40	150	150	200	80	8.0
50	165	165	230	85	10
65	185	185	290	95	14
80	200	200	310	115	22
100	220	220	350	140	38
125	250	250	400	160	47
150	285	285	480	200	60
175	315	315	550	225	95
200	340	340	600	245	115
250	395	405	730	290	150
300	445	460	850	345	230
350	505	520	980	400	280
400	565	580	1100	425	430
450	615	640	1200	450	500
500	670	715	1250	500	670



TECHNICAL FEATURES

Body	Cast iron / Ductile iron
Disc/seat	Bronze or Stainless steel
Design	Body: DIN 86252 with spring
Face to Face	EN 558 Series 1 (DIN 3202 F1)
Flange Dimension	DIN Flanges acc. to EN 1092-2/B (DIN 2501)
Pressure Rating	PN 4 - PN 16
Temperature Range	-10 °C...+180 °C
Options	Without spring
Flange Options	Special flange drilling acc. to ANSI or JIS

- Lift type check valves in DIN Standards, straight pattern, raised flanges as per DIN and bolted bonnet.
- Application: Cold and hot water, gases, steam and other neutral liquids.