
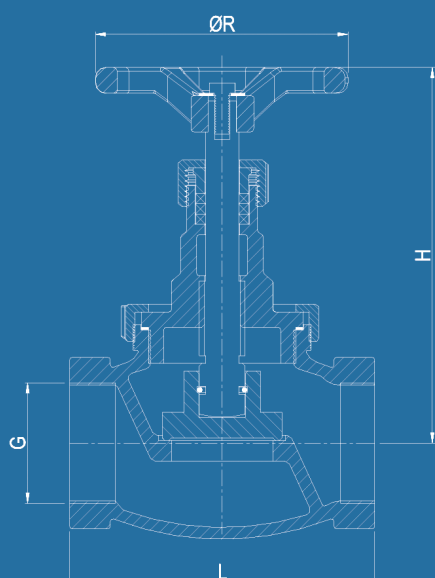


TECHNICAL DATA

GLOBE VALVE - STRAIGHT

SCREWED BONNET

THREADED ENDS - SDNR TYPE

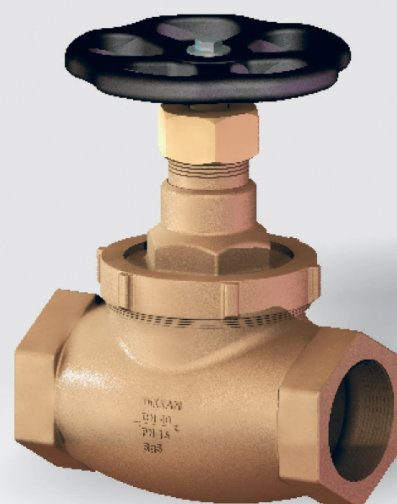

TECHNICAL FEATURES

Body	Bronze
Stem/seat	Bronze
Design	Special design, screwed and secured bonnet, SDNR type
Face to Face	Acc. to below mentioned dimension table
Flange Dimension	BSP-female acc. to DIN EN 10226-1 (DIN 2999)
Pressure Rating	PN 16
Temperature Range	-10 °C...+200 °C
Options	With spring

- Globe valves with screwed and secured bonnet, metal seated, straight pattern, BSP female threaded ends.
- Inside screwed stem and rising handwheel. Primary application area is aboard ships where a light bronze construction is desirable.
- Application: Sea water, water and low pressure steam.

DIMENSIONS

DN (mm)	Pressure rating	G (")	L	L	L	H (mm)	ØR (mm)	Weight (kg)
			STANDARD (mm)	SHORT TYPE (mm)	LONG TYPE (mm)			
10	PN 16	3/8	60	50	56	102	63	0.63
15	PN 16	1/2	65	60	67	102	63	0.62
20	PN 16	3/4	75	70	80	117	80	0.98
25	PN 16	1	90	80	95	124	80	1.4
32	PN 16	1 ¼	105	95	112	130	90	2.0
40	PN 16	1 ½	120	105	132	147	100	3.1
50	PN 16	2	145	130	160	172	125	4.4
65	PN 16	2 ½	170	-	-	180	160	6.0
80	PN 16	3	200	-	-	230	200	8.0
100	PN 16	4	220	-	-	250	200	12



www.wosupply.com