


TECHNICAL DATA

GLOBE VALVE - ANGLE

SCREWED BONNET

SECURED BONNET - SDNR TYPE

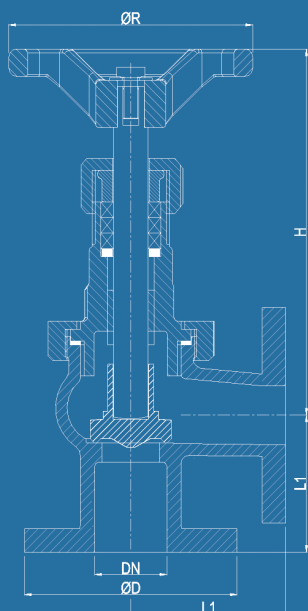

DIMENSIONS

DN (mm)	Pressure rating	ØD (mm)	L (mm)	H (mm)	ØR (mm)	Weight (kg)
15	PN 16	95	65	86	86	1.9
20	PN 16	105	70	100	100	2.7
25	PN 16	115	75	105	105	3.0
32	PN 16	140	90	120	120	4.6
40	PN 16	150	100	135	135	6.0
50	PN 16	165	105	150	150	8.0
65	PN 16	185	115	210	210	12
80	PN 16	200	125	230	230	14

TECHNICAL FEATURES

Body	Bronze
Stem/seat	Bronze
Design	Special design, short pattern, SDNR type
Face to Face	Acc. to below mentioned dimension table
Flange Dimension	DIN Flanges acc. to EN 1092-3/A (DIN 2501)
Pressure Rating	PN 16
Temperature Range	-10 °C...+200 °C
Options	With spring
Flange Options	Special flange drilling acc. to ANSI or JIS

- Globe valves with pressure rating PN 16, angle pattern, flat faced flanges acc. to DIN PN 16, screwed and secured bonnet, inside screwed stem and rising handwheel. TYPE APPROVED.
- Application: Sea water, water and low pressure steam.



www.wosupply.com