


TECHNICAL DATA

SWING CHECK VALVE

WAFER TYPE (SANDWICH TYPE)

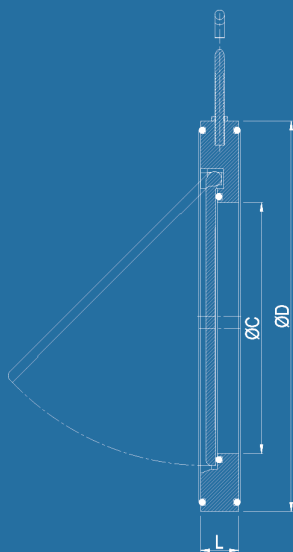

DIMENSIONS

DN (mm)	Pressure rating	ØD (mm)	L (mm)	C (mm)	Weight (kg)
40	PN 16	94	16	22	0.8
50	PN 16	109	16	30	1.1
65	PN 16	129	16	37	1.6
80	PN 16	144	16	48	2.0
100	PN 16	164	16	70	2.4
125	PN 16	194	18	95	3.3
150	PN 16	220	19	121	4.5
200	PN 16	275	29	155	10
250	PN 10	330	29	196	16
300	PN 10	380	38	230	28
350	PN 10	440	41	250	35
400	PN 10	491	51	303	60
450	PN 10	541	51	358	68
500	PN 10	596	61	398	80
600	PN 10	698	71	480	120



TECHNICAL FEATURES

Body	Bronze
Disc	Bronze
Design	Special sandwich type, for fitting between flanges
Face to Face	Acc. to below mentioned dimension table
Pressure Rating	PN 10 / PN 16
Temperature Range	-10 °C...+100 °C
Options	EPDM or PTFE disc seal, with spring
Flange and Bore Options	Available acc. to customers request

- Wafer type check valves with short face to face length, disc and flange sealing by NBR O- ring, are suitable for fitting between DIN flanges.
- Suitable for horizontal and vertical (upward flow) installation and have low weight and low pressure loss.
- Application: They offer excellent resistance to the corrosive action of seawater, fresh water and waste water.