
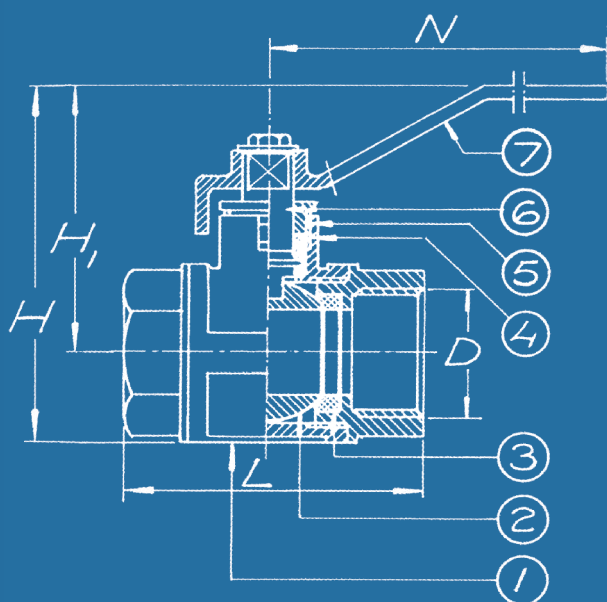


# TECHNICAL DATA

## BALL VALVE

### FULL BORE - SCREWED END

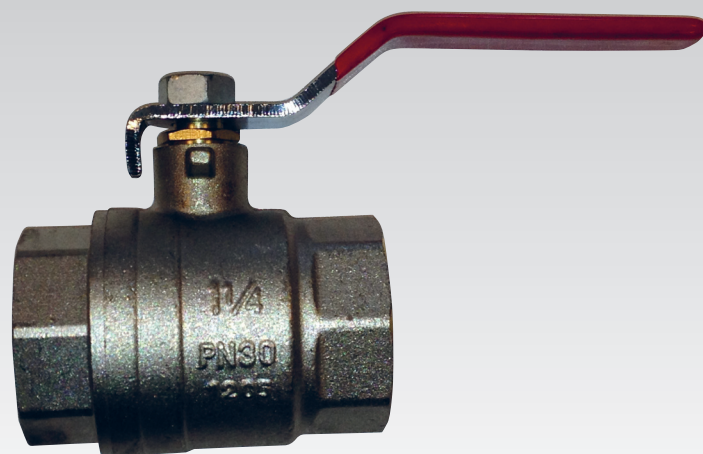

### TECHNICAL FEATURES

1 Body	Bronze Rg5 / Brass
2 Ball	Brass, Handchrome
3 Seating	PTFE
4 Stem packing	PTFE
5 Gland	Brass
6 Stem	Brass
7 Lever DN8-50	AISI 430
8 Lever DN65-100	AISI 430

#### Variants:

- Seating carbon filled PTFE
- Stainless steel lever

### DIMENSIONS Other dimensions/materials on request

DN (mm)	D (")	N (mm)	L (mm)	H1 (mm)	H (mm)	Max. working pressure		Weight (kg)
						Mpa 100°C	Mpa 185°C	
8	1/4	88	51	41	55	2,5	2,0	0,2
10	3/8	88	51	41	56	2,5	2,0	0,2
15	1/2	88	62	43	60	2,5	2,0	0,3
20	3/4	105	70	50	67	2,5	2,0	0,4
25	1	105	85	55	78	2,5	2,0	0,7
32	1 1/4	140	100	70	105	2,5	2,0	1,1
40	1 1/2	140	110	85	120	2,5	2,0	1,4
50	2	155	134	96	140	2,5	2,0	2,4
65	2 1/2	200	142	120	175	2,5	2,0	3,3
80	3	285	180	134	197	2,5	2,0	3,7
100	4	285	210	147	175	2,5	2,0	4,5

[www.wosupply.com](http://www.wosupply.com)