


TEST PRESSURE

HYDRAULIC TEST		kgf/cm ²	psi
	SHELL	24.6	350
	SEAT	15.8	225

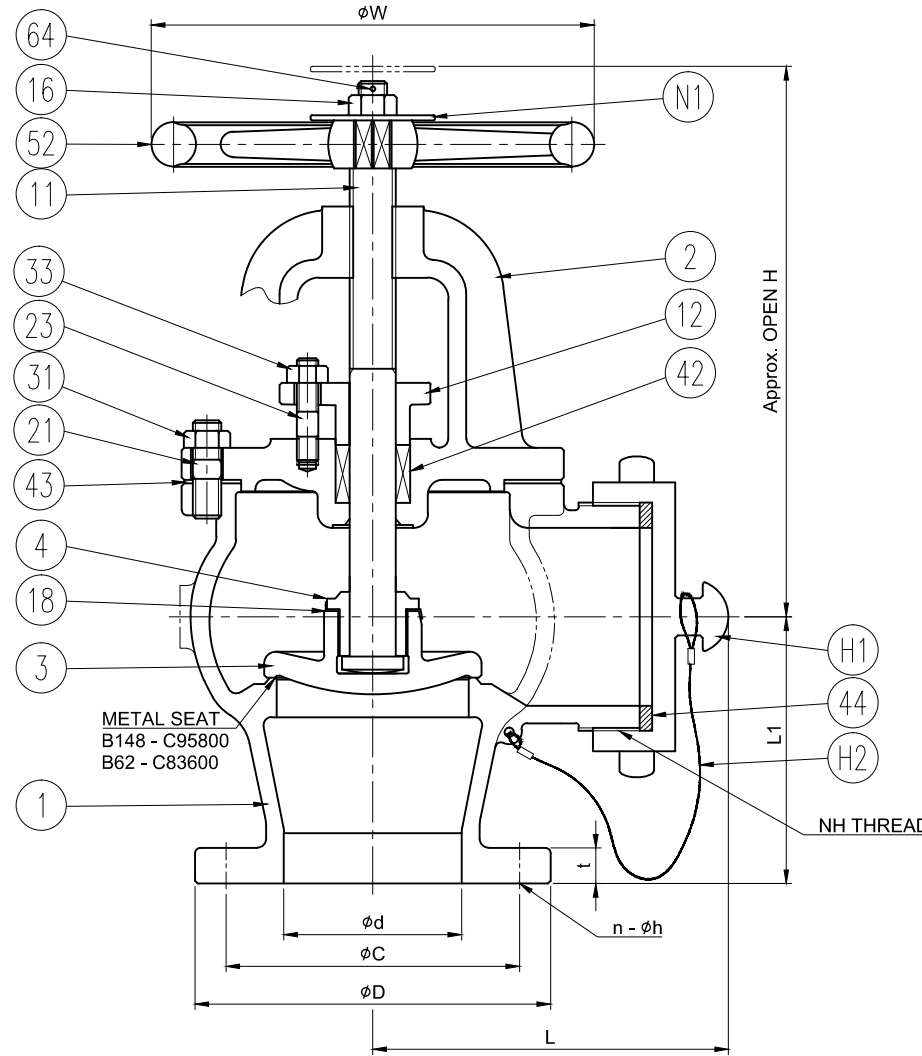

NOTES

- * Applicable Standard
- 1. Flange Dimension : ASME B16.24, FF
- 2. Inspection & Test : API 598
- 3. Country of Origin : Korea

N1	NAME PLATE	AL / BRASS / 304 S.S
H2	WIRE	304 S.S
H1	CAP	B62 - C83600
64	SPLIT PIN	BRASS
52	HAND WHEEL	A126 - CL.B
44	GASKET	NBR
43	GASKET	NON - ASBESTOS
42	PACKING	PTFE
33	GLAND NUT	B124 - C37700
31	BONNET NUT	B124 - C37700
23	GLAND BOLT	B124 - C37700
21	BONNET BOLT	B124 - C37700
18	DISC LOCK WASHER	BRASS
16	HAND WHEEL NUT	B124 - C37700
12	GLAND FLANGE	B62 - C83600
11	STEM	B150 - C63000
4	DISC NUT	B148 - C95800 / B150 - C63000
3	DISC (SEAT)	B148 - C95800
2	BONNET	B62 - C83600
1	BODY (SEAT)	B62 - C83600

NO.	PART NAME	MATERIAL	REMARKS
-----	-----------	----------	---------

△					
△					

△	2020.10.27	Material Changed	J.S.LIM	S.K.CHOI	H.Y.JUNG
REV. NO.	DATE	DESCRIPTION	DRW'D BY	CHK'D BY	APP'D BY

TITLE		CAST BRONZE HOSE ANGLE VALVE			
RATING	Class 150		SIZE	See Table	UNIT mm
DRW'D BY	CHK'D BY	APP'D BY	DATE	2020.10.16	SCALE N / S
J.S.LIM	S.K.CHOI	H.Y.JUNG	TYPE Bolted Bonnet		
			DWG. NO.	BH1A0AG - HM - WD01	

[Unit : mm]

NPS	BORE φd	FLANGE ASME 150lbs FF					L	L1	H	φW
		φD	φC	t	n	φh				
2 - 1/2"	63.5	180	139.7	14.2	4	19	137	108	207	180

W&S SPACE

SPACE FIG NO. △ 055403.450