


TEST PRESSURE

HYDRAULIC TEST		kgf/cm <sup>2</sup>	psi
	SHELL	24.6	350
	SEAT	15.8	225

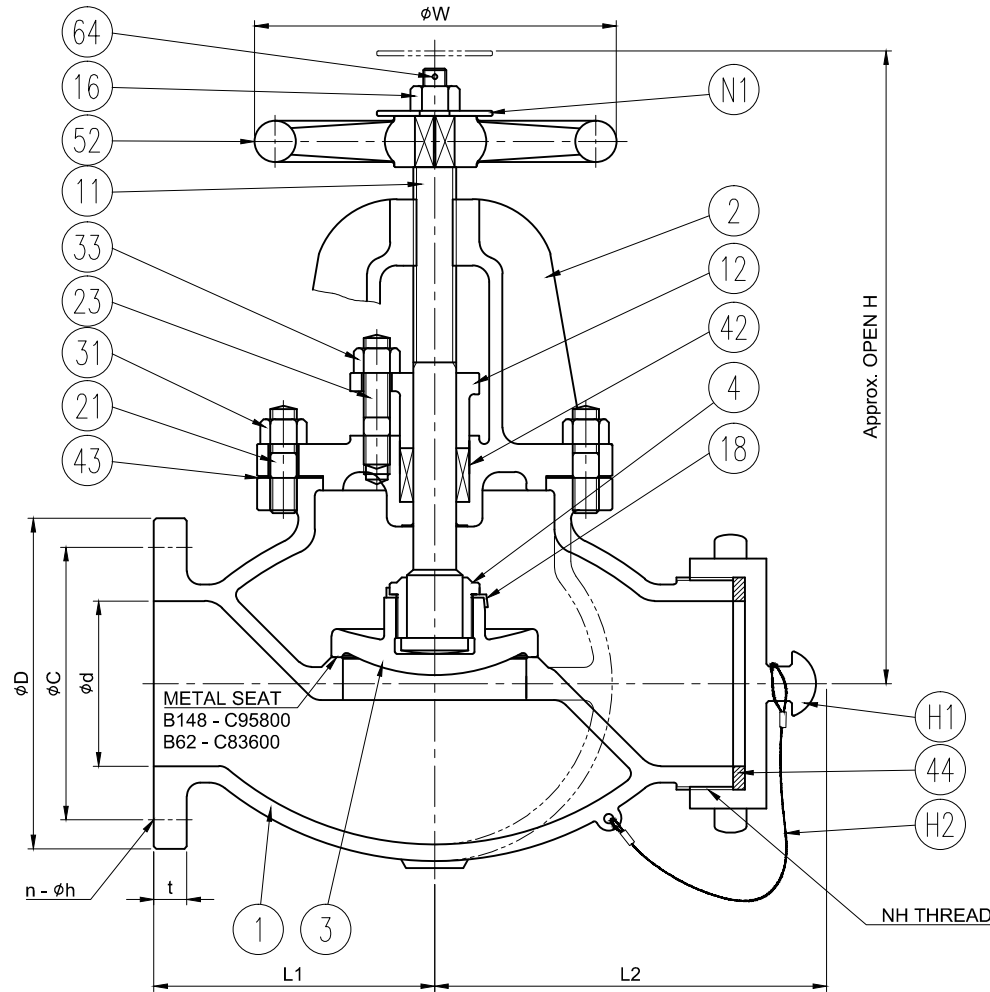

NOTES

- \* Applicable Standard
- 1. Flange Dimension : ASME B16.24, FF
- 2. Inspection & Test : API 598
- 3. Country of Origin : Korea

N1	NAME PLATE	AL / BRASS / 304 S.S	
H2	WIRE	304 S.S	
H1	CAP	B62 - C83600	
64	SPLIT PIN	BRASS	
52	HAND WHEEL	A126 - CL.B	
44	GASKET	NBR	
43	GASKET	NON - ASBESTOS	
42	PACKING	PTFE	
33	GLAND NUT	B124 - C37700	
31	BONNET NUT	B124 - C37700	
23	GLAND BOLT	B124 - C37700	
21	BONNET BOLT	B124 - C37700	
18	DISC LOCK WASHER	BRASS	
16	HAND WHEEL NUT	B124 - C37700	
12	GLAND FLANGE	B62 - C83600	
11	STEM	B150 - C63000	
4	DISC NUT	B148 - C95800 / B150 - C63000	
3	DISC (SEAT)	B148 - C95800	
2	BONNET	B62 - C83600	
1	BODY (SEAT)	B62 - C83600	

NO.	PART NAME	MATERIAL	REMARKS
-----	-----------	----------	---------

△					
△					

△	2020.10.27	Material Changed	J.S.LIM	S.K.CHOI	H.Y.JUNG
---	------------	------------------	---------	----------	----------

REV. NO.	DATE	DESCRIPTION	DRW'D BY	CHK'D BY	APP'D BY
----------	------	-------------	----------	----------	----------

TITLE		CAST BRONZE HOSE GLOBE VALVE			
RATING	Class 150	SIZE	See Table	UNIT	mm
DRW'D BY	CHK'D BY	APP'D BY	DATE	2020.10.16	SCALE N / S
J.S.LIM	S.K.CHOI	H.Y.JUNG	TYPE	Bolted Bonnet	
			DWG. NO.	BH3A0AG - HM - WD01	

[ Unit : mm ]

NPS	BORE φd	FLANGE ASME 150Lbs FF					L1	L2	H	φW
		φD	φC	t	n	φh				
2 - 1/2"	63.5	180	139.7	14.2	4	19	118.4	160	240	180



SPACE FIG NO.      △055303.450