


TEST PRESSURE

HYDRAULIC TEST		kgf/cm ²	psi
	SHELL	24.6	350
	SEAT	15.8	225

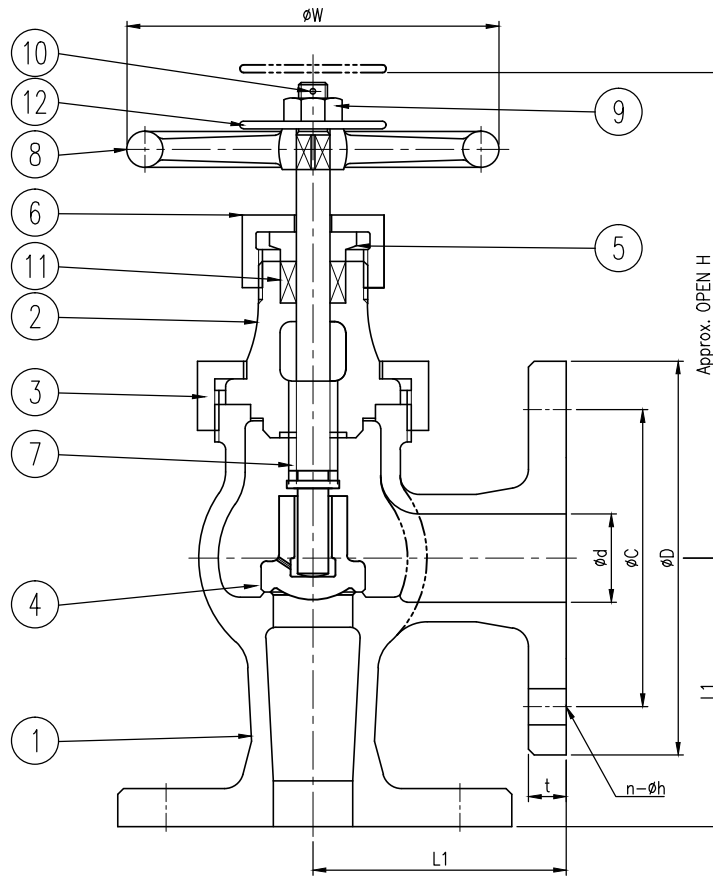

NOTES

- * Applicable Standard
- 1. Face to Face : ASME B16.10
- 2. Flange Dimension : ASME B16.24
- 3. Inspection & Test : API 598
- 4. Country of Origin : Korea

12	NAME PLATE	AL/BRASS/304 S.S	
11	PACKING	PTFE	
10	SPLIT PIN	BRASS	
9	HAND WHEEL NUT	B124-C37700	
8	HAND WHEEL	A126-CL.B	
7	STEM	B150-C63000	
6	GLAND NUT	B124-C37700	
5	PACKING GLAND	B124-C37700	
4	DISC	B62-C83600	
3	UNION NUT	B62-C83600	
2	BONNET	B62-C83600	
1	BODY	B62-C83600	

NO.	PART NAME	MATERIAL	REMARKS		
△	-	-			
△	-	-			
△	2019.07.25				
REV. NO.	DATE	DESCRIPTION	DRW'D BY	CHK'D BY	APP'D BY

[Unit : mm]

NPS	BORE ød	FLANGE ASME 150lbs FF					L1	H	øW
		øD	øC	t	n	øh			
½"	12.7	90	60.5	7.9	4	16	57	120	80
¾"	19.1	100	69.9	8.6	4	16	64	130	80
1"	25.4	110	79.4	9.7	4	16	70	155	100
1-¼"	31.8	115	88.9	10.4	4	16	76	157	100
1-½"	38.1	125	98.4	11.2	4	16	83	190	125
2"	50.8	150	120.7	12.7	4	19	102	233	140

TITLE		CAST BRONZE ANGLE CHECK VALVE				
RATING	Class 150	SIZE	See table	UNIT	mm	
DRW'D BY	CHK'D BY	APP'D BY	DATE	2019.07.10	SCALE	N/S
J.S.LIM	H.Y.JUNG	S.H.AHN	TYPE	Union Bonnet		
			DWG. NO.	ANCV-BC-150P-0.5-3B		
SPACE FIG NO.		15085-B-UB				