

BRONZE HOSE GLOBE & ANGLE 150 - 300 LB

FLANGED x HOSE THREAD

UNION BONNET (1-1/2"), BOLTED BONNET (2-1/2")

SIZES: 1-1/2" & 2-1/2"

DESIGN DESCRIPTION

Bronze globe and angle hose valves are supplied with rising stem, bolted or union bonnet, and flanged ends. These valves have resilient discs. 150 LB and 300 LB flanges conform to ANSI B16.24.

Note: When ordering specify type and number of threads per inch. See hose thread dimensions below.

PARTS AND MATERIAL LIST


PART	MATERIAL	SPECIFICATION
body	bronze	B-62
bonnet	bronze	B-62
bonnet gasket	non-asbestos	commercial
stem*	bronze*	B-62
disc	bronze	B-62
disc locknut	bronze	B-62
gland	bronze	B-62
packing	non-asbestos	commercial
hose cap gasket	rubber	commercial
hose cap	bronze	B-62

*available with Monel stem

PRESSURE / TEMPERATURE RATINGS

200 psi wsp
400 psi wog


550° F
150° F

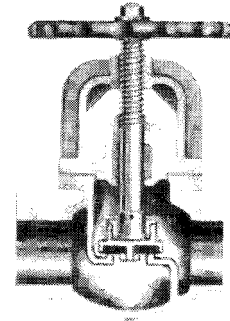

Hose Globe


150 lb x NH 055303
150 lb x NPSH 055301

300 lb x NH 056303
300 lb x NPSH 056301

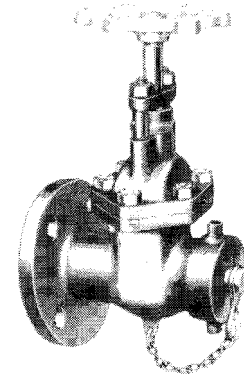

Hose Gate

150 LB x NH 055103
150 LB x NPSH 055101

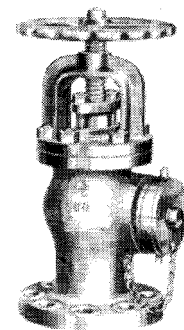

Hose Angle

150 lb x NH 055403
150 lb x NPSH 055401

300 lb x NH 056403
300 lb x NPSH 056401